40A – 1600A INTELLIGENT LOAD TRANSFER PANELS

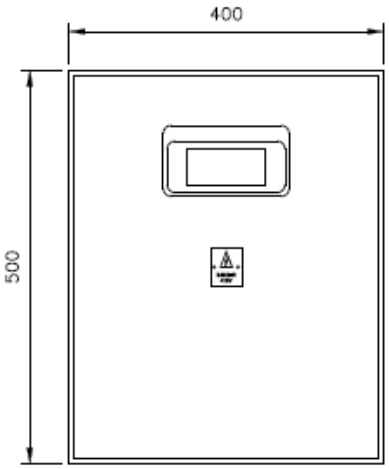

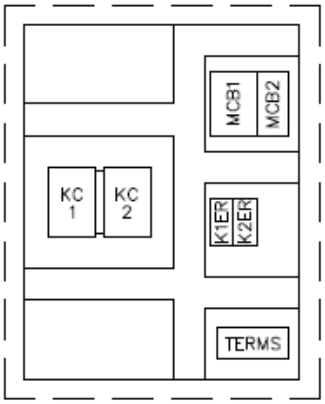

SPECIFICATION

Enclosure

Single Door
IP65 complying with EN50298:EN60529
Type 12, 4, 4X complying with UL508A; UL50
Impact resistance IK10 complying with EN500298; EN50102
Double Door
IP55 complying with EN50298; EN60529
Type 12, 4, 4X complying with UL508A; UL50
Impact resistance IK10 complying with EN500298; EN50102

Switches

40 & 63A
Conformity IEC 60947-3, EN 60947-3
125A to 1600A
Conformity IEC 60947-3, EN 60947-3, VDE 0600-107 (1992), NBN EN 60947-3,
BS EN 60947-3

Contactor

Conformity IEC/EN 60947-1
Approvals - IEC 158-1; VDE 0660; BS 5452; UL; CSA

Controller

Modular (6 modules) din rail mounting
Conformity
IEC 61010-1, IEC 61000-4-2, IEC61000-4-3, IEC 61000-4-4, IEC 61000-4-4,
IEC 61000-4-5, IEC 61000-4-6,IEC 61000-4-8, IEC 61000-4-11, IEC 60068-2-6, IEC60068-2-11, IEC 60068-2-30

Control Relays

Conforms to CE low voltage directive
Approvals - UL, VDE, CSA

Terminals

Din Rail mounting
EN 60947-7-1, DIN VDE 0611 T1, UL, CSA, KEMA, ATEX, FM, SEV, GL

RATING	***SIZE (HXWXD)***	***CABLING MM2 (max)***
40A	400 x 500 x 150	10

LAYOUT
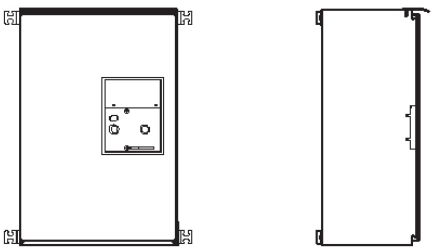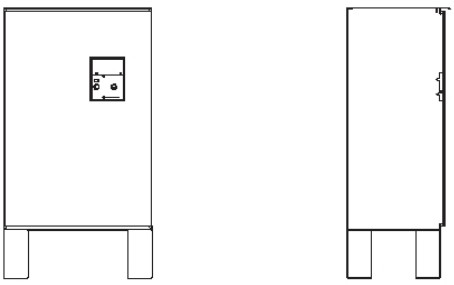
Wall Mounted	**Floor Mounted**